

# Test Report

Applicant: SHENZHEN MARK TRADING CO., LTD.

Product Name: WIRED GAMEPAD

Brand Name: MARVO,XTRIKE ME, @ONE

Model No.: GT-016, GT-\*\*\*, GT-\*\*, GP-\*\*\*, EGC-\*\*\*(\*\*stand for 0-9)  
(\*stand for 0-9)

Date of Receipt : Jul.22, 2019

Date of Test: Jul.23-24, 2019

Date of Report: Jul.25, 2019

Prepared by: Shenzhen Most Technology Service Co., Ltd.

**The EMC testing has been performed on the submitted samples and found in compliance with the council EMC directive 2014/30/EU.**

Shenzhen Most Technology Service Co., Ltd.  
No.5, 2nd Langshan Road, North District, Hi-tech Industry Park,  
Nanshan, Shenzhen, Guangdong, China  
Phone: 86-755-86026850  
Fax: 86-755-26013350  
[http:// www.szmost.com](http://www.szmost.com)

# TABLE OF CONTENTS

| Description   | Page      |
|---|-----------|
| Test Report Declaration .....   | 4         |
| <b>1. GENERAL INFORMATION .....</b>                                   | <b>5</b>  |
| 1.1. Description of Device (EUT) .....                                | 5         |
| 1.2. Operational Mode(s) of EUT.....                                  | 5         |
| 1.3. Test Voltage(s) of EUT .....                                     | 5         |
| <b>2. DESCRIPTION OF TEST STANDARD .....</b>                          | <b>6</b>  |
| <b>3. LABORATORY INFORMATION.....</b>                                 | <b>7</b>  |
| 3.1. Laboratory Name .....  | 7         |
| 3.2. Location .....   | 7         |
| 3.3. Test facility .....  | 7         |
| 3.4. Measurement Uncertainty.....                                     | 7         |
| <b>4. SUMMARY OF TEST RESULTS.....</b>                                | <b>8</b>  |
| <b>5. BLOCK DIAGRAM OF TEST SETUP .....</b>                           | <b>9</b>  |
| 5.1. Block Diagram of connection between EUT and simulation-EMI ..... | 9         |
| 5.2. Block Diagram of connection between EUT and simulation-EMS.....  | 9         |
| <b>6. TEST INSTRUMENT USED .....</b>                                  | <b>10</b> |
| 6.1. For Conducted Disturbance at Mains Terminals Emission Test ..... | 10        |
| 6.2. For Radiation Test (In Anechoic Chamber) .....                   | 10        |
| 6.3. For Harmonic / Flicker Test .....                                | 10        |
| 6.4. For Electrostatic Discharge Immunity Test.....                   | 10        |
| 6.5. For RF Strength Susceptibility Test .....                        | 10        |
| 6.6. For Electrical Fast Transient/Burst Immunity Test .....          | 11        |
| 6.7. For Surge Test .....   | 11        |
| 6.8. For Injected Currents Susceptibility Test .....                  | 11        |
| 6.9. For Magnetic Field Immunity Test.....                            | 11        |
| 6.10. For Voltage Dips and Interruptions Test .....                   | 11        |
| <b>7. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST.....</b>          | <b>12</b> |
| 7.1. Configuration of Test System.....                                | 12        |
| 7.2. Test Standard .....  | 12        |
| 7.3. Power Line Conducted Disturbance at Mains Terminals Limit .....  | 12        |
| 7.4. Test Procedure .....   | 12        |
| 7.5. Conducted Disturbance at Mains Terminals Test Results .....      | 13        |
| <b>8. RADIATED DISTURBANCE TEST .....</b>                             | <b>14</b> |
| 8.1. Configuration of Test System.....                                | 14        |
| 8.2. Test Standard .....  | 14        |
| 8.3. Radiated Disturbance Limit.....                                  | 15        |
| 8.4. Test Procedure .....   | 15        |
| 8.5. Radiated Disturbance Test Results.....                           | 15        |
| <b>9. HARMONIC CURRENT TEST.....</b>                                  | <b>16</b> |
| 9.1. Configuration of Test System.....                                | 16        |
| 9.2. Test Standard .....  | 16        |
| 9.3. Test Results .....   | 16        |
| <b>10. VOLTAGE FLUCTUATIONS &amp; FLICKER TEST .....</b>              | <b>17</b> |
| 10.1. Configuration of Test System.....                               | 17        |
| 10.2. Test Standard .....   | 17        |
| 10.3. Test Limits.....  | 17        |
| 10.4. Test Results .....  | 17        |
| <b>11. IMMUNITY PERFORMANCE CRITERIA.....</b>                         | <b>18</b> |
| <b>12. ELECTROSTATIC DISCHARGE IMMUNITY TEST .....</b>                | <b>19</b> |

|                                  |  |           |
|----------------------------------|--|-----------|
| 12.1.                            | Configuration of Test System.....                          | 19        |
| 12.2.                            | Test Standard .....  | 19        |
| 12.3.                            | Severity Levels and Performance Criterion.....             | 20        |
| 12.4.                            | Test Procedure .....                                       | 20        |
| 12.5.                            | Test Results .....   | 20        |
| <b>13.</b>                       | <b>RF FIELD STRENGTH SUSCEPTIBILITY TEST .....</b>         | <b>22</b> |
| 13.1.                            | Configuration of Test System.....                          | 22        |
| 13.2.                            | Test Standard .....  | 22        |
| 13.3.                            | Severity Levels and Performance Criterion.....             | 22        |
| 13.4.                            | Test Procedure .....                                       | 23        |
| 13.5.                            | Test Results .....   | 23        |
| <b>14.</b>                       | <b>ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST .....</b> | <b>25</b> |
| 14.1.                            | Configuration of Test System.....                          | 25        |
| 14.2.                            | Test Standard .....  | 25        |
| 14.3.                            | Severity Levels and Performance Criterion.....             | 26        |
| 14.4.                            | Test Procedure .....                                       | 26        |
| 14.5.                            | Test Results .....   | 26        |
| <b>15.</b>                       | <b>SURGE TEST .....</b>                                    | <b>27</b> |
| 15.1.                            | Configuration of Test System.....                          | 27        |
| 15.2.                            | Test Standard .....  | 27        |
| 15.3.                            | Severity Levels and Performance Criterion.....             | 27        |
| 15.4.                            | Test Procedure .....                                       | 28        |
| 15.5.                            | Test Results .....   | 28        |
| <b>16.</b>                       | <b>INJECTED CURRENTS SUSCEPTIBILITY TEST .....</b>         | <b>29</b> |
| 16.1.                            | Configuration of Test System.....                          | 29        |
| 16.2.                            | Test Standard .....  | 29        |
| 16.3.                            | Severity Levels and Performance Criterion.....             | 29        |
| 16.4.                            | Test Procedure .....                                       | 30        |
| 16.5.                            | Test Results .....   | 30        |
| <b>17.</b>                       | <b>MAGNETIC FIELD IMMUNITY TEST .....</b>                  | <b>31</b> |
| 17.1.                            | Configuration of Test System.....                          | 31        |
| 17.2.                            | Test Standard .....  | 31        |
| 17.3.                            | Severity Levels and Performance Criterion.....             | 31        |
| 17.4.                            | Test Procedure .....                                       | 32        |
| 17.5.                            | Test Results .....   | 32        |
| <b>18.</b>                       | <b>VOLTAGE DIPS AND INTERRUPTIONS TEST.....</b>            | <b>34</b> |
| 18.1.                            | Configuration of Test System.....                          | 34        |
| 18.2.                            | Test Standard .....  | 34        |
| 18.3.                            | Severity Levels and Performance Criterion.....             | 34        |
| 18.4.                            | Test Procedure .....                                       | 35        |
| 18.5.                            | Test Results .....   | 35        |
| APPENDIX I                       |  | (2 pages) |
| APPENDIX II (Test Photos)        |  | (1 page)  |
| APPENDIX III (Photos of the EUT) |  | (5 Pages) |

# TEST REPORT DECLARATION

|   |   |               |
|---|---|---------------|
| Report Number   | MTEN19071187  |               |
| Applicant   | SHENZHEN MARK TRADING CO., LTD.   |               |
|   | 6th Floor, Building A, DongFangYaYuan, Chen Tian Communities, Xixiang Bao'an District, Shenzhen, China        |               |
| Manufacturer  | SHENZHEN MARK TRADING CO., LTD.   |               |
|   | 6th Floor, Building A, DongFangYaYuan, Chen Tian Communities, Xixiang Bao'an District, Shenzhen, China        |               |
| Product   | Product Name  | WIRED GAMEPAD |
|   | Model No.   | GT-016        |
|   | Power Supply  | DC5V          |
| Test Result   | The EUT was found compliant with the requirement(s) of the standards.   |               |
| Standard  | EN 55032:2015, EN 55035:2017<br>(IEC 61000-4-2:2008, IEC 61000-4-3:2006+A1:2007+A2:2010, IEC 61000-4-8:2009,) |               |
| <p><b>*Note</b></p> <p>The above device has been tested by Shenzhen Most Technology Service Co., Ltd. To determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test record, data evaluation &amp; Equipment Under Test (EUT) configurations represented are contained in this test report and Shenzhen Most Technology Service Co., Ltd. Is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the requirement of the above standards.</p> <p>This report applies to above tested sample only. This report shall not be reproduced except in full, without written approval of Shenzhen Most Technology Service Co., Ltd., this document may be altered or revised by Shenzhen Most Technology Service Co., Ltd., personal only, and shall be noted in the revision of the document.</p> |   |               |
| Prepared by   | <i>Lili Lu</i>  |               |
|   | Lili Lu(Engineer)   |               |
| Reviewed by   | <i>Sunny</i>  |               |
|   | Sunny Deng(Engineer)  |               |
| Approved by   | <i>Yvette</i>   |               |
|   | Yvette Zhou(Manager)  |               |



# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

|              |   |   |
|--------------|---|---|
| Description  | : | WIRED GAMEPAD   |
| Model Number | : | GT-016, GT-***, GT-**, GP-***,<br>EGC-***(***stand for 0-9) (**stand for 0-9) |
| Remark       | : | Used GT-016 does all tests  |

## 1.2. Operational Mode(s) of EUT

|              |   |              |
|--------------|---|--------------|
| Order Number | : | Test Mode(s) |
| 1            | : | Running      |
|              | : |              |
|              | : |              |
|              | : |              |

## 1.3. Test Voltage(s) of EUT

|              |   |                 |
|--------------|---|-----------------|
| Order Number | : | Test Voltage(s) |
| 1            | : | DC 5V           |
|              | : |                 |
|              | : |                 |
|              | : |                 |

## 2. DESCRIPTION OF TEST STANDARD

The intention of this publication is to establish uniform requirements for the radio disturbance level of the equipment contained in the scope, to fix limits of disturbance, to describe methods of measurement and to standardize operating conditions and interpretation of results.

The following referenced standard are indispensable for the application of this report.

Referenced Description below:

EN 55032:2015

Information Technology Equipment-Radio disturbance characteristics-Limits and methods of measurement.

EN 55035:2017

Information technology equipment - Immunity characteristics - Limits and methods of measurement.

### 3. LABORATORY INFORMATION

#### 3.1. Laboratory Name

Shenzhen Most Technology Service Co., Ltd.

#### 3.2. Location

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

#### 3.3. Test facility

- 3m Anechoic Chamber : Nov. 28, 2012 File on Federal Communication Commission  
Registration Number:490827
  
- Shielding Room : Nov. 28, 2012 File on Federal Communication Commission  
Registration Number:490827
  
- EMC Lab. : Accredited by TUV Rheinland Shenzhen  
Audit Report: UA 50149851  
Mar. 12, 2009  
  
 Accredited by Industry Canada  
Registration Number: 7103A-1  
Oct. 22, 2012  
  
 Accredited by TIMCO  
Registration Number: Q1460  
March 28, 2010

#### 3.4. Measurement Uncertainty

| No. | Item                                       | Uncertainty |
|-----|--|-------------|
| 1.  | Uncertainty for Conducted Disturbance Test | 1.25dB      |
| 2.  | Uncertainty for Radiated Disturbance Test  | 3.15dB      |

#### 4. SUMMARY OF TEST RESULTS


| <b>EMISSION</b>                                   |                                     |                             |                |
|---|-------------------------------------|-----------------------------|----------------|
| <b>Test Item</b>                                  | <b>Standard</b>                     | <b>Limits</b>               | <b>Results</b> |
| Conducted disturbance at mains terminals          | EN 55032:2015                       | Class B                     | N/A            |
| Radiated disturbance                              | EN 55032:2015                       | Class B                     | PASS           |
| Conducted Emissions From Asymmetric Mode          | EN 55032:2015                       | Class B                     | N/A            |
| Conducted Differential Voltage Emissions          | EN 55032:2015                       | Class B                     | N/A            |
| Harmonic current emissions                        | EN 61000-3-2:2014                   | ---                         | N/A            |
| Voltage fluctuations & flicker                    | EN 61000-3-3:2013                   | ---                         | N/A            |
| <b>IMMUNITY (EN 55035:2017)</b>                   |                                     |                             |                |
| <b>Test Item</b>                                  | <b>Basic Standard</b>               | <b>Performance Criteria</b> | <b>Results</b> |
| Electrostatic discharge (ESD)                     | IEC 61000-4-2:2008                  | B                           | PASS           |
| Radio-frequency, Continuous radiated disturbance  | IEC 61000-4-3:2006 +A1:2007+A2:2010 | A                           | PASS           |
| Electrical fast transient (EFT)                   | IEC 61000-4-4:2012                  | B                           | N/A            |
| Surge (Input a.c. power ports)                    | IEC 61000-4-5:2014                  | B                           | N/A            |
| Surge (Telecommunication ports)                   |                                     | B                           | N/A            |
| Radio-frequency, Continuous conducted disturbance | IEC 61000-4-6:2013                  | A                           | N/A            |
| Power frequency magnetic field                    | IEC 61000-4-8:2009                  | A                           | PASS           |
| Voltage dips, >95% reduction                      | IEC 61000-4-11:2004+A1:2017         | B                           | N/A            |
| Voltage dips, 30% reduction                       |                                     | C                           | N/A            |
| Voltage interruptions                             |                                     | C                           | N/A            |
| N/A is an abbreviation for Not Applicable.        |                                     |                             |                |



## 5. BLOCK DIAGRAM OF TEST SETUP


The equipments are installed test to meet EN 55032 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. EUT was tested in normal configuration (Please See following Block diagrams)

### 5.1. Block Diagram of connection between EUT and simulation-EMI



(EUT: WIRED GAMEPAD)

### 5.2. Block Diagram of connection between EUT and simulation-EMS



(EUT: WIRED GAMEPAD)

## 6. TEST INSTRUMENT USED

### 6.1. For Conducted Disturbance at Mains Terminals Emission Test

| Item | Equipment      | Manufacturer    | Model No. | Serial No. | Last Cal.   | Cal. Interval |
|------|----------------|-----------------|-----------|------------|-------------|---------------|
| 1.   | Test Receiver  | Rohde & Schwarz | ESCI      | 100492     | Mar. 09, 19 | 1 Year        |
| 2.   | L.I.S.N.       | Rohde & Schwarz | ENV216    | 100093     | Mar. 09, 19 | 1 Year        |
| 3.   | Coaxial Switch | Anritsu Corp    | MP59B     | 6200283933 | Mar. 09, 19 | 1 Year        |
| 4.   | Terminator     | Hubersuhner     | 50Ω       | No.1       | Mar. 09, 19 | 1 Year        |
| 5.   | RF Cable       | SchwarzBeck     | N/A       | No.1       | Mar. 09, 19 | 1 Year        |

### 6.2. For Radiation Test (In Anechoic Chamber)

| Item | Equipment                      | Manufacturer    | Model No.  | Serial No. | Last Cal.   | Cal. Interval |
|------|--------------------------------|-----------------|------------|------------|-------------|---------------|
| 1.   | Test Receiver                  | Rohde & Schwarz | ESPI       | 101202     | Mar. 09, 19 | 1 Year        |
| 2.   | Bilog Antenna                  | Sunol           | JB3        | A121206    | Mar. 09, 19 | 1 Year        |
| 3.   | Cable                          | Resenberger     | N/A        | NO.1       | Mar. 09, 19 | 1 Year        |
| 4.   | Cable                          | SchwarzBeck     | N/A        | NO.2       | Mar. 09, 19 | 1 Year        |
| 5.   | Cable                          | SchwarzBeck     | N/A        | NO.3       | Mar. 09, 19 | 1 Year        |
| 6.   | DC Power Filter                | DuoJi           | DL2×30B    | N/A        | N/A         | N/A           |
| 7.   | Single Phase Power Line Filter | DuoJi           | FNF 202B30 | N/A        | N/A         | N/A           |
| 8.   | 3 Phase Power Line Filter      | DuoJi           | FNF 402B30 | N/A        | N/A         | N/A           |

### 6.3. For Harmonic / Flicker Test

| Item | Equipment              | Manufacturer | Model No.     | Serial No. | Last Cal.   | Cal. Interval |
|------|------------------------|--------------|---------------|------------|-------------|---------------|
| 1.   | AC Power Source        | Kikusui      | AC40MA        | LM003232   | Mar. 09, 19 | 1 Year        |
| 2.   | Test Analyzer          | Kikusui      | KHA1000       | LM003720   | Mar. 09, 19 | 1 Year        |
| 3.   | Line Impedance Network | Kikusui      | LIN40MA-PCR-L | LM002352   | Mar. 09, 19 | 1 Year        |

### 6.4. For Electrostatic Discharge Immunity Test

| Item | Equipment  | Manufacturer | Model No. | Serial No. | Last Cal.   | Cal. Interval |
|------|------------|--------------|-----------|------------|-------------|---------------|
| 1.   | ESD Tester | Zhongsheng   | ESD-203AX | 023K14538  | Mar. 09, 19 | 1 Year        |

### 6.5. For RF Strength Susceptibility Test

| Item | Equipment        | Manufacturer | Model No. | Serial No. | Last Cal.   | Cal. Interval |
|------|------------------|--------------|-----------|------------|-------------|---------------|
| 1.   | Signal Generator | IFR          | 2032      | 203002/100 | Mar. 09, 19 | 1 Year        |

|    |                          |          |                        |           |             |        |
|----|--------------------------|----------|------------------------|-----------|-------------|--------|
| 2. | Amplifier                | A&R      | 150S3SSDC<br>120XKF000 | 301584    | NCR         | NCR    |
| 3. | Dual Directional Coupler | A&R      | DC6080                 | 301508    | Mar. 09, 19 | 1 Year |
| 4. | Power Sensor             | Anritsu  | MA2491A                | 32263     | Mar. 09, 19 | 1 Year |
| 5. | Power Meter              | R&S      | NRVS                   | 100444    | Mar. 09, 19 | 1 Year |
| 6. | Field Monitor            | A&R      | FM5004                 | 300329    | Mar. 09, 19 | 1 Year |
| 7. | Field Probe              | A&R      | FP5000                 | 300221    | Mar. 09, 19 | 1 Year |
| 8. | Log-periodic Antenna     | A&R      | AT1080                 | 16512     | Mar. 09, 19 | 1 Year |
| 9. | RF Cable                 | MIYAZAKI | N/A                    | No.1/No.2 | Mar. 09, 19 | 1 Year |

#### 6.6. For Electrical Fast Transient/Burst Immunity Test

| Item | Equipment     | Manufacturer | Model No.  | Serial No.  | Last Cal.   | Cal. Interval |
|------|---------------|--------------|------------|-------------|-------------|---------------|
| 1.   | EMCPRO System | EM Test      | UCS-500-M4 | V0648102026 | Mar. 09, 19 | 1 Year        |

#### 6.7. For Surge Test

| Item | Equipment     | Manufacturer | Model No.  | Serial No.  | Last Cal.   | Cal. Interval |
|------|---------------|--------------|------------|-------------|-------------|---------------|
| 1.   | EMCPRO System | EM Test      | UCS-500-M4 | V0648102026 | Mar. 09, 19 | 1 Year        |

#### 6.8. For Injected Currents Susceptibility Test

| Item | Equipment          | Manufacturer | Model No.              | Serial No. | Last Cal.   | Cal. Interval |
|------|--------------------|--------------|------------------------|------------|-------------|---------------|
| 1.   | Signal Generator   | IFR          | 2032                   | 203002/100 | Mar. 09, 19 | 1 Year        |
| 2.   | Amplifier          | A&R          | 150S3SSDC<br>120XKF000 | 301584     | NCR         | NCR           |
| 3.   | CDN                | FCC          | FCC-801-M2-25          | 47         | Mar. 09, 19 | 1 Year        |
| 4.   | CDN                | FCC          | FCC-801-M3-25          | 107        | Mar. 09, 19 | 1 Year        |
| 5.   | EM Injection Clamp | FCC          | F-203I-23mm            | 403        | Mar. 09, 19 | 1 Year        |
| 6.   | RF Cable           | MIYAZAKI     | N/A                    | No.1/No.2  | Mar. 09, 19 | 1 Year        |

#### 6.9. For Magnetic Field Immunity Test


| Item | Equipment     | Manufacturer | Model No.  | Serial No.  | Last Cal.   | Cal. Interval |
|------|---------------|--------------|------------|-------------|-------------|---------------|
| 1.   | EMCPRO System | EM Test      | UCS-500-M4 | V0648102026 | Mar. 09, 19 | 1 Year        |

#### 6.10. For Voltage Dips and Interruptions Test

| Item | Equipment     | Manufacturer | Model No.  | Serial No.  | Last Cal.   | Cal. Interval |
|------|---------------|--------------|------------|-------------|-------------|---------------|
| 1.   | EMCPRO System | EM Test      | UCS-500-M4 | V0648102026 | Mar. 09, 19 | 1 Year        |

## 7. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST

### 7.1. Configuration of Test System

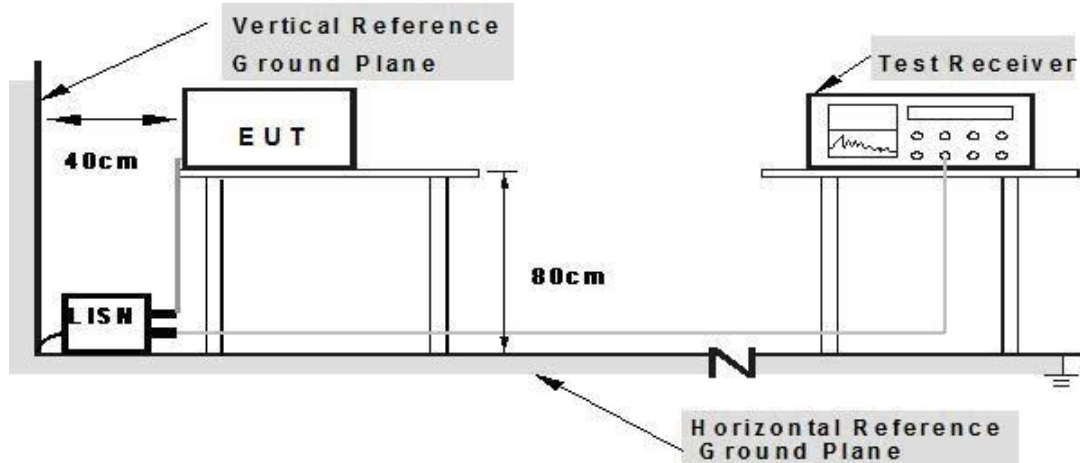

- Note: 1. Support units were connected to second LISN.**  
**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 7.2. Test Standard

EN 55032:2015

### 7.3. Power Line Conducted Disturbance at Mains Terminals Limit

| Frequency       | Maximum RF Line Voltage          |                               |
|-----------------|----------------------------------|-------------------------------|
|                 | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
| 150kHz ~ 500kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500kHz ~ 5MHz   | 56                               | 46                            |
| 5MHz ~ 30MHz    | 60                               | 50                            |

- Notes: 1. \* Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 7.4. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55032 Class B on conducted Disturbance test.

The bandwidth of test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 7.5.

## 7.5. Conducted Disturbance at Mains Terminals Test Results

7.5.1. Test Results: **N/A**

7.5.2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

7.5.3. Emission Level= Correct Factor + Reading Level.

## 8. RADIATED DISTURBANCE TEST

### 8.1. Configuration of Test System

Radiated Emission Test Set-Up Frequency Below 1 GHz

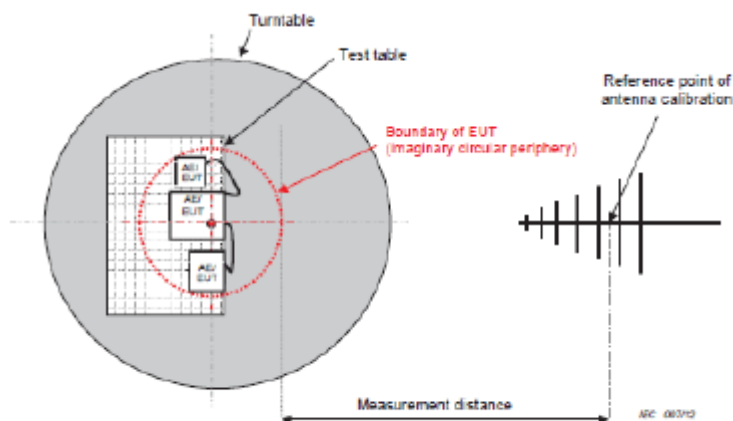


Figure C.1 – Measurement distance

Radiated Emission Test Set-Up Frequency Above 1GHz

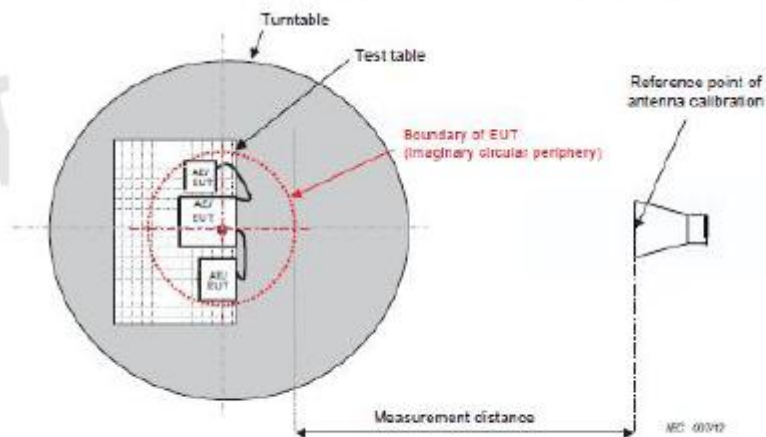


Figure C.1 – Measurement distance

### 8.2. Test Standard

EN 55032:2015

### 8.3. Radiated Disturbance Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

| FREQUENCY<br>(MHz) | Distance<br>(m) | Detector type/<br>bandwidth | Class A | Class B |
|--------------------|-----------------|-----------------------------|---------|---------|
|                    |                 |                             | dBuV/m  | dBuV/m  |
| 30 - 230           | 3               | Quasi peak/<br>120 kHz      | 50      | 40      |
| 230 - 1000         | 3               | Quasi peak/<br>120 kHz      | 57      | 47      |
| 1000-3000          | 3               | Peak/1 MHz                  | 76      | 70      |
| 3000-6000          | 3               | Peak/1 MHz                  | 80      | 74      |
| 1000-3000          | 3               | AV/1 MHz                    | 56      | 50      |
| 3000-6000          | 3               | AV/1 MHz                    | 60      | 54      |

Note: 1. The lower limit shall apply at the transition frequencies.

2. Distance refers to the distance in meters between the test antenna and the closed point of any part of the EUT.

### 8.4. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55032 Class B on Radiated Disturbance test.

The bandwidth setting on the test receiver is 120 kHz.

The frequency range from 30MHz to 1000MHz is checked. The test result are reported on Section 8.5.

### 8.5. Radiated Disturbance Test Results

8.5.1. Test Results: **PASS**


8.5.2. Emission Level= Correct Factor + Reading Level.

8.5.3. All reading are Quasi-Peak values.

8.5.4. The test data and the scanning waveform are attached within Appendix I.

## 9. HARMONIC CURRENT TEST

### 9.1. Configuration of Test System

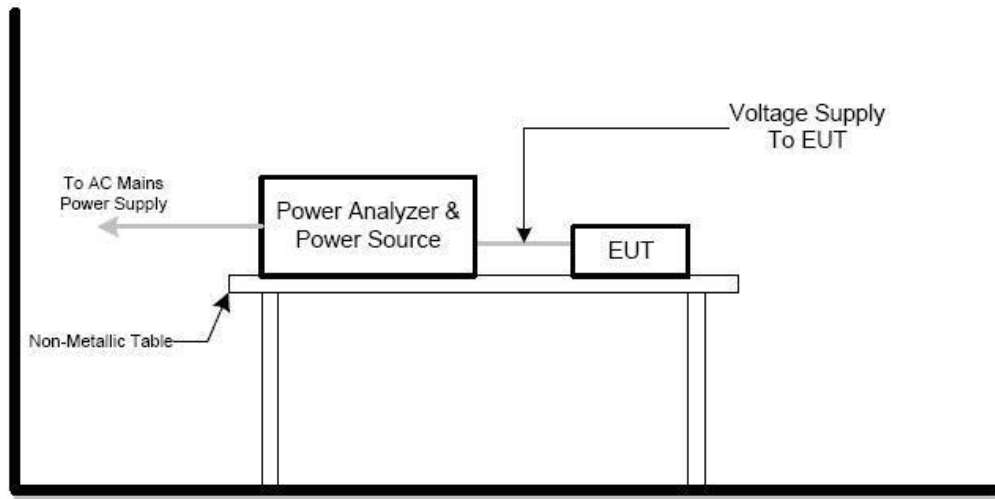

### 9.2. Test Standard

EN 61000-3-2:2014; Class A


### 9.3. Test Results

No limits apply for equipment with an active input power less than or equal to 75W



## 10. VOLTAGE FLUCTUATIONS & FLICKER TEST

### 10.1. Configuration of Test System

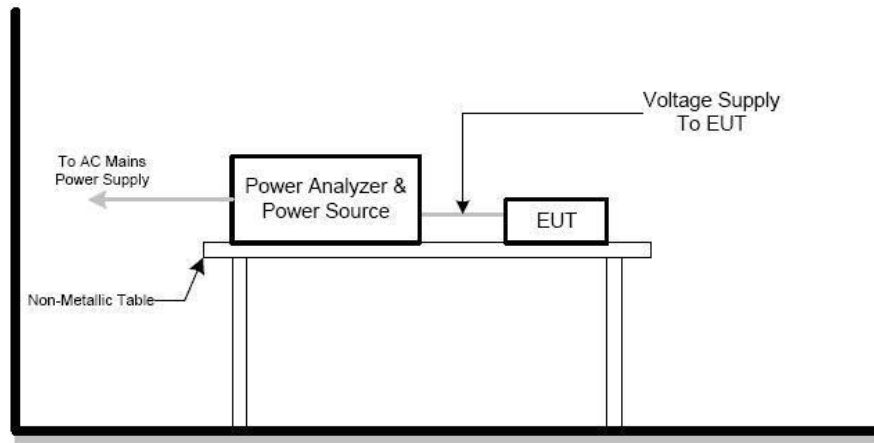

### 10.2. Test Standard

EN 61000-3-3:2013

### 10.3. Test Limits

The limits shall be applicable to voltage fluctuations and flicker at the supply terminals of the equipment under test, the following limits apply:

the value of  $P_{st}$  shall not be greater than 1.0;

the value of  $Plt$  shall not be greater than 0.65;

the value of  $d(t)$  during a voltage change shall not exceed 3.3% for more than 500ms;

the relative steady-state voltage change,  $dc$ , shall not exceed 3.3%;

the maximum relative voltage change  $d_{max}$ , shall not exceed

a) 4% without additional conditions;

b) 6% for equipment which is:

Switched manually, or

Switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

c) 7% for equipment which is

Attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or

switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

### 10.4. Test Results

10.4.1. Test Results: N/A

## 11. IMMUNITY PERFORMANCE CRITERIA

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

Based on the used product standard

Based on the declaration of the manufacturer, requestor or purchaser

Criterion A:

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Criterion B:

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.


Criterion C:

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

## 12.ELECTROSTATIC DISCHARGE IMMUNITY TEST

### 12.1.Configuration of Test System

#### 12.1.1. TEST SETUP

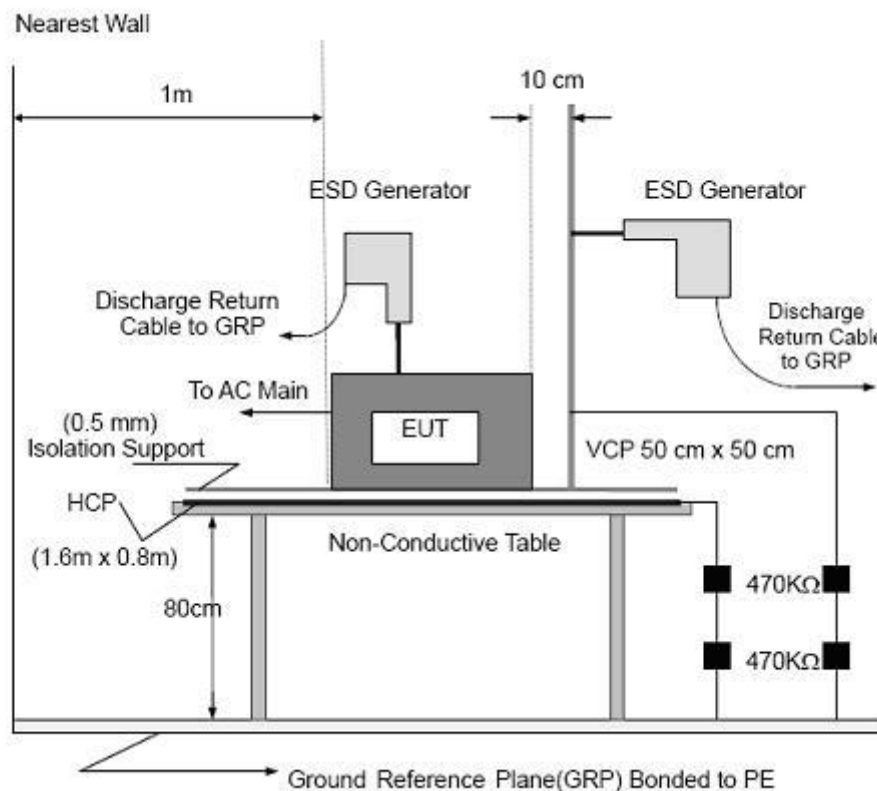

### 12.2.Test Standard

EN 55035:2017(IEC 61000-4-2:2008)  
 (Severity Level 3 for Air Discharge at 8KV,  
 Severity Level 2 for Contact Discharge at 4KV)

## 12.3. Severity Levels and Performance Criterion

### 12.3.1. Severity level

| Level | Test Voltage<br>Contact Discharge (KV) | Test Voltage<br>Air Discharge (KV) |
|-------|--|------------------------------------|
| 1.    | 2                                      | 2                                  |
| 2.    | 4                                      | 4                                  |
| 3.    | 6                                      | 8                                  |
| 4.    | 8                                      | 15                                 |
| X     | Special                                | Special                            |

### 12.3.2. Performance criterion : **B**

## 12.4. Test Procedure

### 12.4.1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

### 12.4.2. Contact Discharge:

All the procedure was same as Section 12.4.1. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. the tip of the discharge electrode was touch the EUT before the discharge switch was operated.

## 12.5. Test Results

### 12.5.1. Test Results: **PASS**


### 12.5.2. Test data on the following pages.

# Electrostatic Discharge Test Results

Shenzhen Most Technology Service Co., Ltd.


|   |  |                      |              |
|---|--|----------------------|--------------|
| <i>Test Voltage</i> :   | 1  | <i>Test Date:</i>    | Jul.24, 2019 |
| <i>Test Mode</i> :  | 1  | <i>Criterion</i> :   | B            |
| <i>Temperature:</i>   | 24 °C  | <i>Humidity:</i>     | 56%          |
| <i>Air Discharge: ±8KV</i> # For Air Discharge each Point Positive 10 times and negative 10 times discharge.<br><i>Contact Discharge: ±4KV</i> # For Contact Discharge each point positive 25 times and negative 25 times discharge |  |                      |              |
| <i>Test Results Description</i>   |  |                      |              |
| <b><i>Location</i></b>  | <b><i>Kind</i></b><br>A-Air Discharge<br>C-Contact Discharge | <b><i>Result</i></b> |              |
| <i>Gaps</i>   | A  | PASS                 |              |
| <i>Keys</i>   | A  | PASS                 |              |
| <i>Port</i>   | C  | PASS                 |              |
| <i>Screw</i>  | C  | PASS                 |              |
| <i>HCP</i>  | C  | PASS                 |              |
| <i>VCP of Front</i>   | C  | PASS                 |              |
| <i>VCP of Rear</i>  | C  | PASS                 |              |
| <i>VCP of Left</i>  | C  | PASS                 |              |
| <i>VCP of Right</i>   | C  | PASS                 |              |
| <i>Remark :</i>   |  |                      |              |

*Discharge was considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

  
 Reviewer : \_\_\_\_\_

## 13. RF FIELD STRENGTH SUSCEPTIBILITY TEST

### 13.1. Configuration of Test System

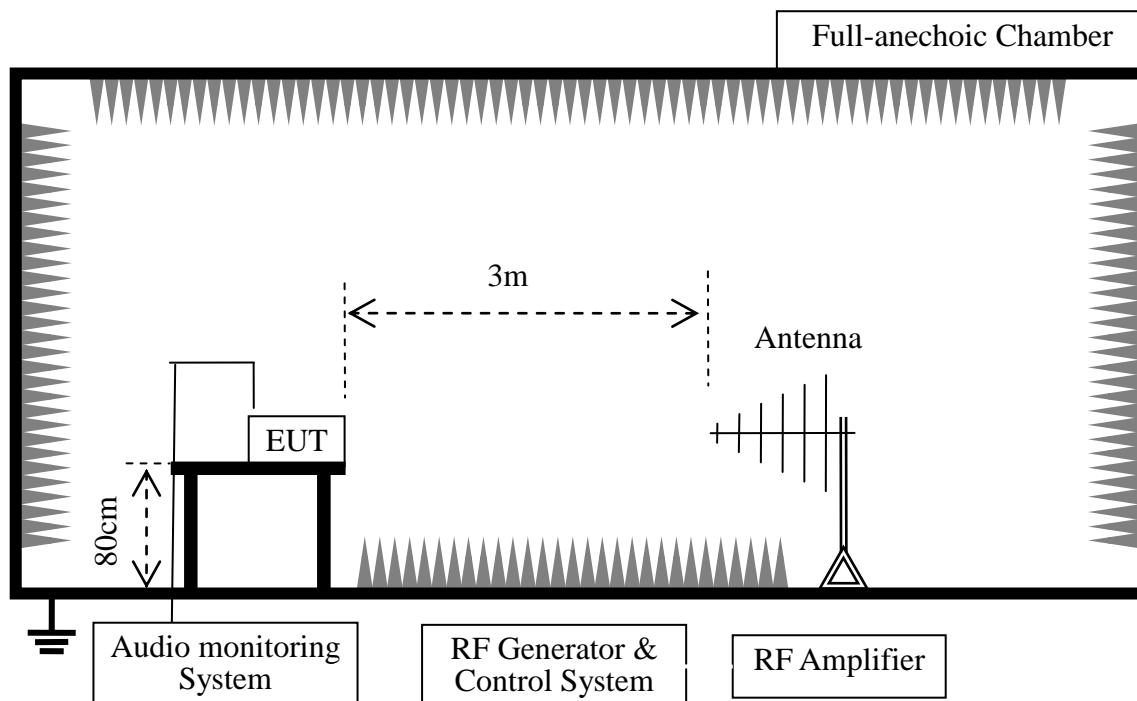

### 13.2. Test Standard

EN 55035:2017 (IEC 61000-4-3:2006+A1:2007+A2:2010)  
(Severity Level: 2 at 3V / m)

### 13.3. Severity Levels and Performance Criterion

|                       |   |
|-----------------------|---|
| Basic Standard:       | IEC 61000-4-3   |
| Required Performance: | A   |
| Frequency Range:      | 80 MHz - 1000 MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz |
| Field Strength:       | 3 V/m   |
| Modulation:           | 1kHz Sine Wave, 80%, AM Modulation                    |
| Frequency Step:       | 1 % of fundamental                                    |
| Polarity of Antenna:  | Horizontal and Vertical                               |
| Test Distance:        | 3 m   |
| Antenna Height:       | 1.5 m   |
| Dwell Time:           | at least 3 seconds                                    |

### 13.4. Test Procedure

- a. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The frequency range is swept from 80 MHz to 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000 MHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 13.5. Test Results

13.5.1. Test Results: **PASS**

13.5.2. Test data on the following pages.

# *RF Field Strength Susceptibility Test Results*

*Shenzhen Most Technology Service Co., Ltd.*

|               |        |                    |     |
|---------------|--------|--------------------|-----|
| Temperature:  | 24.0°C | Relative Humidity: | 56% |
| Test Voltage: | 1      | Test Mode:         | 1   |

| Frequency Range (MHz) | RF Field Position | R.F. Field Strength                                 | Azimuth | Perform. Criteria | Results | Judgment |
|-----------------------|-------------------|---|---------|-------------------|---------|----------|
| 80MHz - 1000MHz       | H / V             | <i>3 V/m (rms)<br/>AM Modulated<br/>1000Hz, 80%</i> | Front   | A                 | A       | PASS     |
|                       |                   |   | Rear    |                   |         |          |
|                       |                   |   | Left    |                   |         |          |
|                       |                   |   | Right   |                   |         |          |
| 1800MHz               | H / V             | <i>3 V/m (rms)<br/>AM Modulated<br/>1000Hz, 80%</i> | Front   | N/A               | N/A     | N/A      |
|                       |                   |   | Rear    |                   |         |          |
|                       |                   |   | Left    |                   |         |          |
|                       |                   |   | Right   |                   |         |          |
| 2600MHz               | H / V             | <i>3 V/m (rms)<br/>AM Modulated<br/>1000Hz, 80%</i> | Front   | N/A               | N/A     | N/A      |
|                       |                   |   | Rear    |                   |         |          |
|                       |                   |   | Left    |                   |         |          |
|                       |                   |   | Right   |                   |         |          |
| 3500MHz               | H / V             | <i>3 V/m (rms)<br/>AM Modulated<br/>1000Hz, 80%</i> | Front   | N/A               | N/A     | N/A      |
|                       |                   |   | Rear    |                   |         |          |
|                       |                   |   | Left    |                   |         |          |
|                       |                   |   | Right   |                   |         |          |
| 5000MHz               | H / V             | <i>3 V/m (rms)<br/>AM Modulated<br/>1000Hz, 80%</i> | Front   | N/A               | N/A     | N/A      |
|                       |                   |   | Rear    |                   |         |          |
|                       |                   |   | Left    |                   |         |          |
|                       |                   |   | Right   |                   |         |          |



Reviewer :

\_\_\_\_\_ *Sunny*



# 14.ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

## 14.1.Configuration of Test System

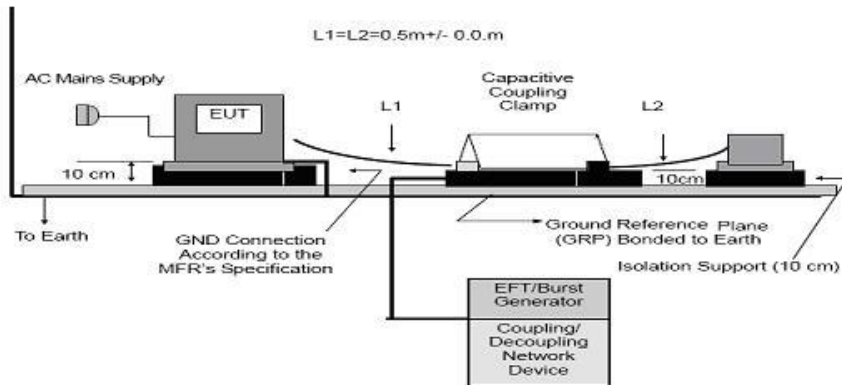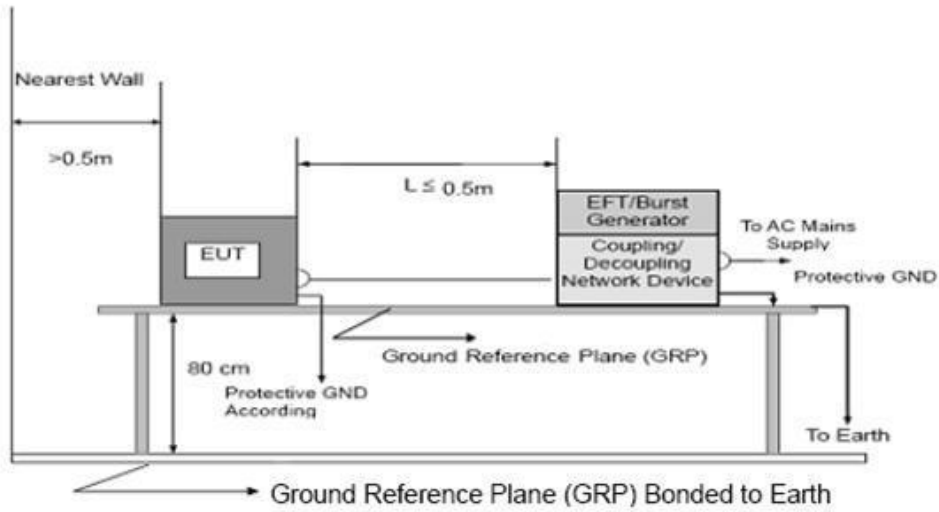

## 14.2.Test Standard

EN 55035:2017(IEC 61000-4-4:2012)  
(Severity Level 2 at 1KV)

## 14.3. Severity Levels and Performance Criterion

### 14.3.1. Severity level

| Open Circuit Output Test Voltage $\pm 10\%$ |                       |   |
|---|-----------------------|---|
| Level                                       | On Power Supply Lines | On I/O (Input/Output) Signal data and control lines |
| 1.  | 0.5 KV                | 0.25 KV   |
| 2.  | 1 KV                  | 0.5 KV  |
| 3.  | 2 KV                  | 1 KV  |
| 4.  | 4 KV                  | 2 KV  |
| X   | Special               | Special   |

### 14.3.2. Performance criterion : **B**

## 14.4. Test Procedure

The EUT and its simulators were placed on a the ground reference plane and were insulated from it by an wood support  $0.1\text{m} \pm 0.01\text{m}$  thick. The ground reference plane was  $1\text{m} \times 1\text{m}$  metallic sheet with  $0.65\text{mm}$  minimum thickness. This reference ground plane was project beyond the EUT by at least  $0.1\text{m}$  on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than  $0.5\text{m}$ . All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

### 14.4.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage was applied during compliance test and the duration of the test can't less than 2mins.

### 14.4.2. For signal lines and control lines ports:

It's unnecessary to test.

### 14.4.3. For DC input and DC output power ports:


It's unnecessary to test.

## 14.5. Test Results

### 14.5.1. Test Results: **N/A**

# 15.SURGE TEST

## 15.1.Configuration of Test System

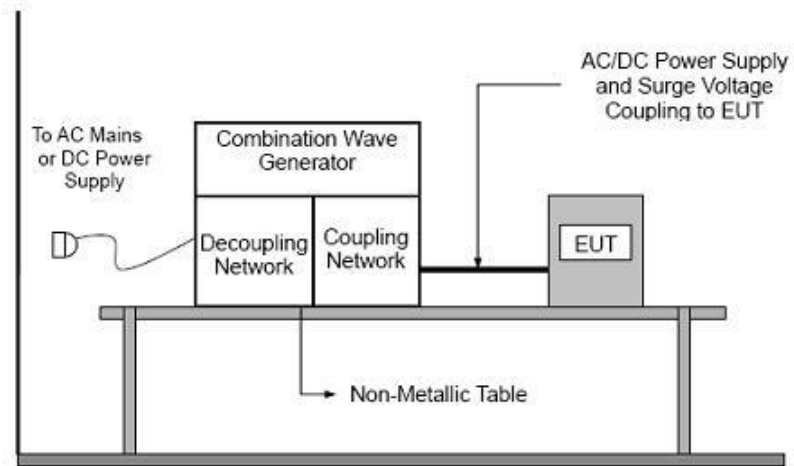

## 15.2.Test Standard

EN 55032:2015(IEC 61000-4-5:2014)  
(Severity Level : Line to Line was Level 2 at 1KV  
Line to PE was Level 3 at 2KV)

## 15.3.Severity Levels and Performance Criterion

### 15.3.1.Severity level

| Severity Level | Open-Circuit Test Voltage<br>KV |
|----------------|---------------------------------|
| 1              | 0.5                             |
| 2              | 1.0                             |
| 3              | 2.0                             |
| 4              | 4.0                             |
| *              | Special                         |

### 15.3.2.Performance criterion : **B**

## 15.4. Test Procedure

15.4.1. Set up the EUT and test generator as shown on Section 15.1.

15.4.2. For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral line to ground are same except test level is 2KV.

15.4.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.

15.4.4. Different phase angles are done individually.


15.4.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

## 15.5. Test Results

15.5.1. Test Results: N/A

## 16.INJECTED CURRENTS SUSCEPTIBILITY TEST

### 16.1.Configuration of Test System

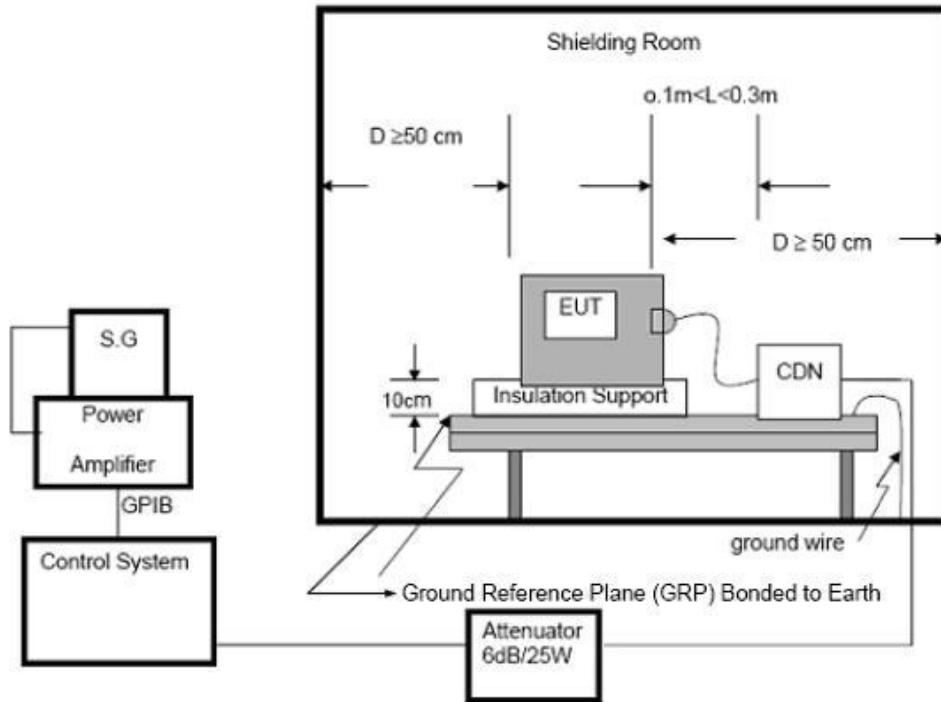

### 16.2.Test Standard

EN 55035:2017(IEC 61000-4-6:2013)

(Severity Level 2 at 3V (r.m.s.) and frequency is from 0.15MHz to 10MHz

Severity Level 1 & Level 2 at 3V (r.m.s.) to 1V (r.m.s.) and frequency is from 10MHz to 30MHz

Severity Level 1 at 1V (r.m.s.) and frequency is from 30MHz to 80MHz)

### 16.3. Severity Levels and Performance Criterion

#### 16.3.1.Severity level

| Level | Voltage Level (e.m.f.) V |
|-------|--------------------------|
| 1.    | 1                        |
| 2.    | 3                        |
| 3.    | 10                       |
| X     | Special                  |

#### 16.3.2.Performance criterion: A

## 16.4. Test Procedure

16.4.1. Set up the EUT, CDN and test generators as shown on Section 16.1.

16.4.2. Let the EUT work in test mode and test it.

16.4.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

16.4.4. The disturbance signal description below is injected to EUT through CDN.

16.4.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.


16.4.6. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

## 16.5. Test Results

16.5.1. Test Results: **N/A**

# 17.MAGNETIC FIELD IMMUNITY TEST

## 17.1.Configuration of Test System

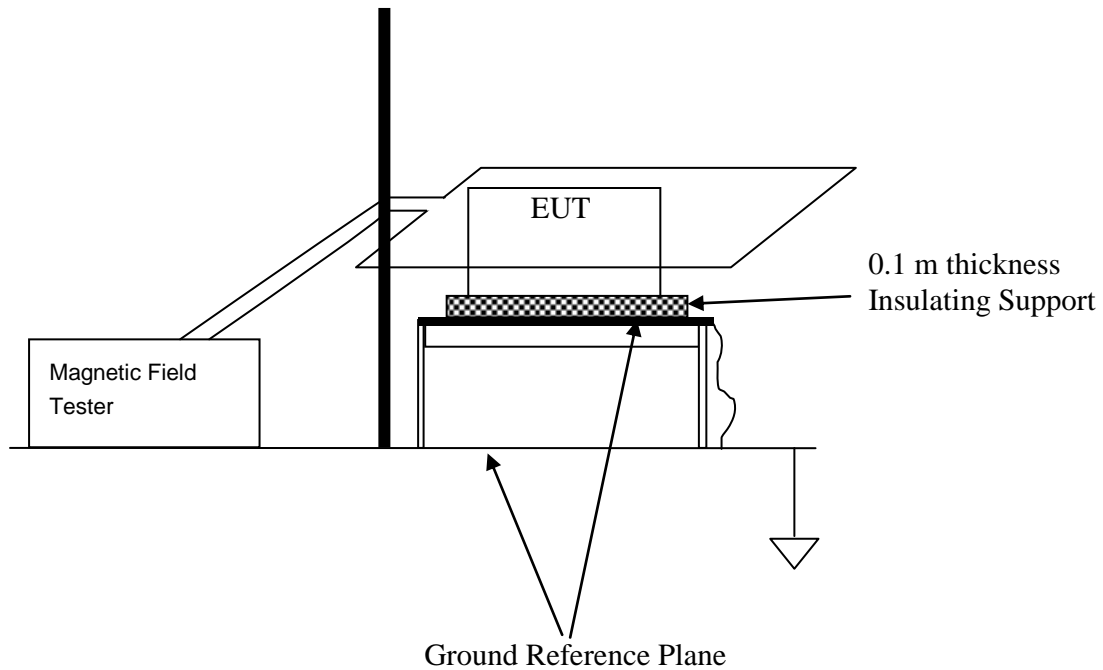

## 17.2.Test Standard

EN 55035:2017(IEC 61000-4-8:2009)  
(Severity Level 1 at 1A/m)

## 17.3.Severity Levels and Performance Criterion

### 17.3.1.Severity level

| Level | Magnetic Field Strength A/m |
|-------|-----------------------------|
| 1.    | 1                           |
| 2.    | 3                           |
| 3.    | 10                          |
| 4.    | 30                          |
| 5.    | 100                         |
| X.    | Special                     |

### 17.3.2.Performance criterion : A

## 17.4. Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m\*1m) and shown in Section 17.1. The induction coil was then rotated by 90° in order to expose the EUT to the test field with different orientations.

## 17.5. Test Results

17.5.1. Test Results: **PASS**

17.5.2. Test data on the following pages.



# Magnetic Field Immunity Test Results


Shenzhen Most Technology Service Co., Ltd.

|                                 |                         |                         |                     |               |
|---------------------------------|-------------------------|-------------------------|---------------------|---------------|
| <i>Test Voltage</i> :           | <i>1</i>                | <i>Test Date:</i>       | <i>Jul.24, 2019</i> |               |
| <i>Test Mode</i> :              | <i>1</i>                | <i>Criterion :</i>      | <i>A</i>            |               |
| <i>Temperature:</i>             | <i>24 °C</i>            | <i>Humidity:</i>        | <i>56%</i>          |               |
| <i>Test Results Description</i> |                         |                         |                     |               |
| <i>Test Level</i>               | <i>Testing Duration</i> | <i>Coil Orientation</i> | <i>Criterion</i>    | <i>Result</i> |
| <i>1A/m(50Hz/60Hz)</i>          | <i>5 mins</i>           | <i>X</i>                | <i>A</i>            | <i>PASS</i>   |
| <i>1A/m(50Hz/60Hz)</i>          | <i>5 mins</i>           | <i>Y</i>                | <i>A</i>            | <i>PASS</i>   |
| <i>1A/m(50Hz/60Hz)</i>          | <i>5 mins</i>           | <i>Z</i>                | <i>A</i>            | <i>PASS</i>   |
| <i>Remark: No function loss</i> |                         |                         |                     |               |

Reviewer :  \_\_\_\_\_

## 18. VOLTAGE DIPS AND INTERRUPTIONS TEST

### 18.1. Configuration of Test System

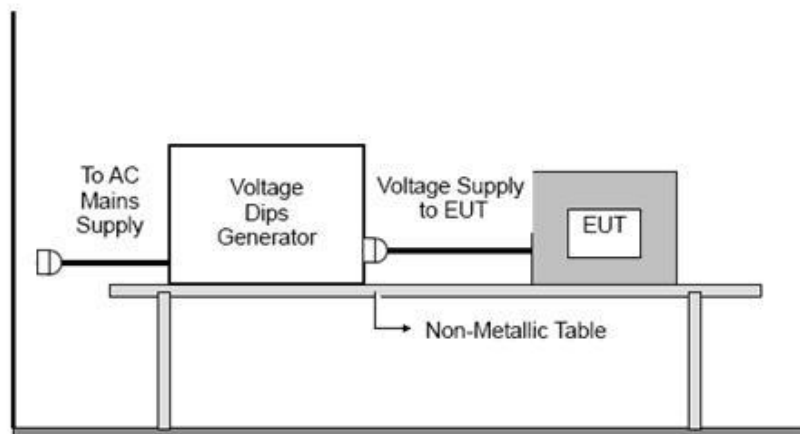

### 18.2. Test Standard

EN 55035:2017(IEC 61000-4-11:2004+A1:2017)

(Severity level: 0%            250 period  
   0%            0.5 periods  
   70%           25 periods )

### 18.3. Severity Levels and Performance Criterion

#### 18.3.1. Severity level

| Test Level<br>%U <sub>T</sub> | Voltage dip and<br>short interruptions<br>%U <sub>T</sub> | Performance<br>Criterion | Duration<br>(in period) |
|-------------------------------|---|--------------------------|-------------------------|
| 0                             | 100   | C                        | 250                     |
| 0                             | 100   | B                        | 0.5                     |
| 70                            | 30  | C                        | 25                      |

#### 18.3.2. Performance criterion : **B & C**

## 18.4. Test Procedure

18.4.1. The EUT and test generator were setup as shown on Section 18.1.

18.4.2. The interruptions is introduced at selected phase angles with specified duration.


18.4.3. Record any degradation of performance.

## 18.5. Test Results

18.5.1. Test Results: N/A

# **APPENDIX I**


|                         |                |               |            |
|-------------------------|----------------|---------------|------------|
| EUT:                    | WIRED GAMEPAD  | M/N:          | GT-016     |
| Mode:                   | Running        | Polarization: | Vertical   |
| Test by:                | Jaya           | Power:        | DC 5V      |
| Temperature: / Humidity | 30.0°C / 54.0% | Test date:    | 2019-07-24 |

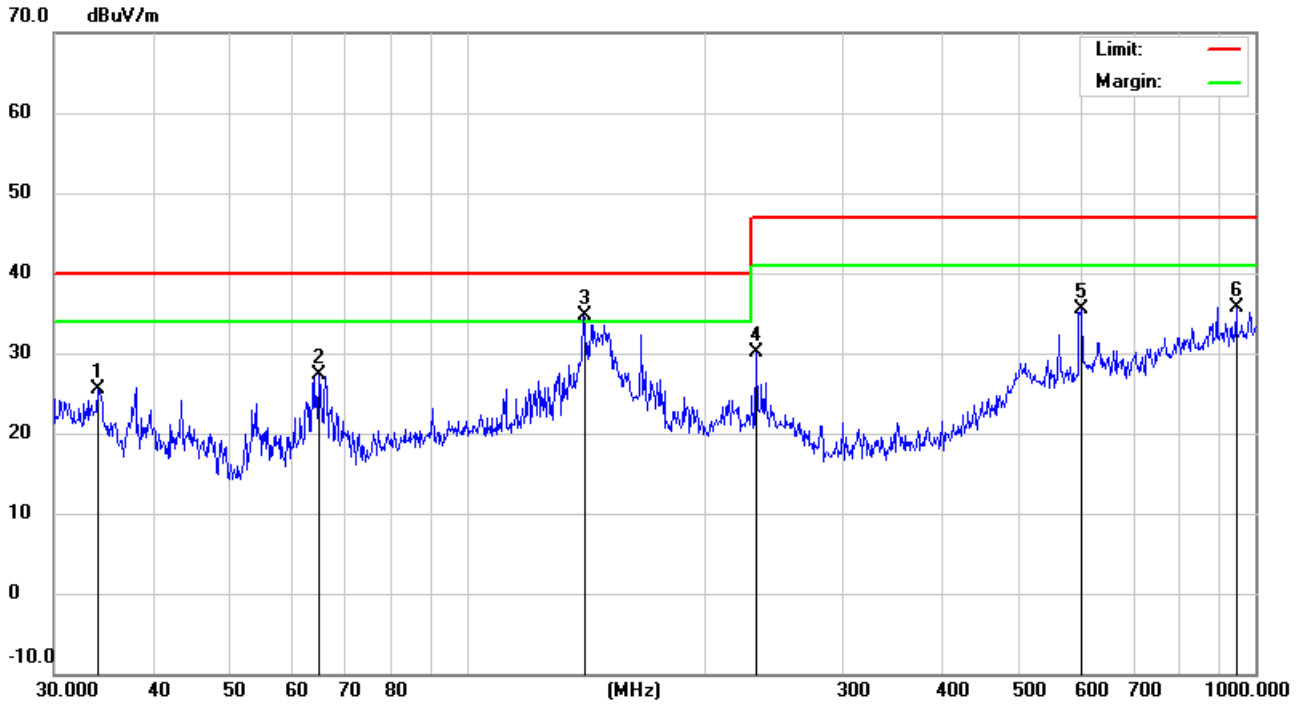

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|-------------------------|---------------------------|---------|
| 1   |     | 34.0365      | 7.44                     | 18.16                   | 25.60                      | 40.00           | -14.40     | QP       |                         |                           |         |
| 2   |     | 64.8865      | 18.42                    | 8.94                    | 27.36                      | 40.00           | -12.64     | QP       |                         |                           |         |
| 3   | *   | 140.8351     | 18.27                    | 16.51                   | 34.78                      | 40.00           | -5.22      | QP       |                         |                           |         |
| 4   |     | 232.5318     | 15.76                    | 14.29                   | 30.05                      | 47.00           | -16.95     | QP       |                         |                           |         |
| 5   |     | 601.4265     | 11.63                    | 23.82                   | 35.45                      | 47.00           | -11.55     | QP       |                         |                           |         |
| 6   |     | 945.4399     | 6.34                     | 29.45                   | 35.79                      | 47.00           | -11.21     | QP       |                         |                           |         |

\*:Maximum data    x:Over limit    !:over margin

|                         |                |               |            |
|-------------------------|----------------|---------------|------------|
| EUT:                    | WIRED GAMEPAD  | M/N:          | GT-016     |
| Mode:                   | Running        | Polarization: | Horizontal |
| Test by:                | Jaya           | Power:        | DC 5V      |
| Temperature: / Humidity | 30.0°C / 54.0% | Test date:    | 2019-07-24 |

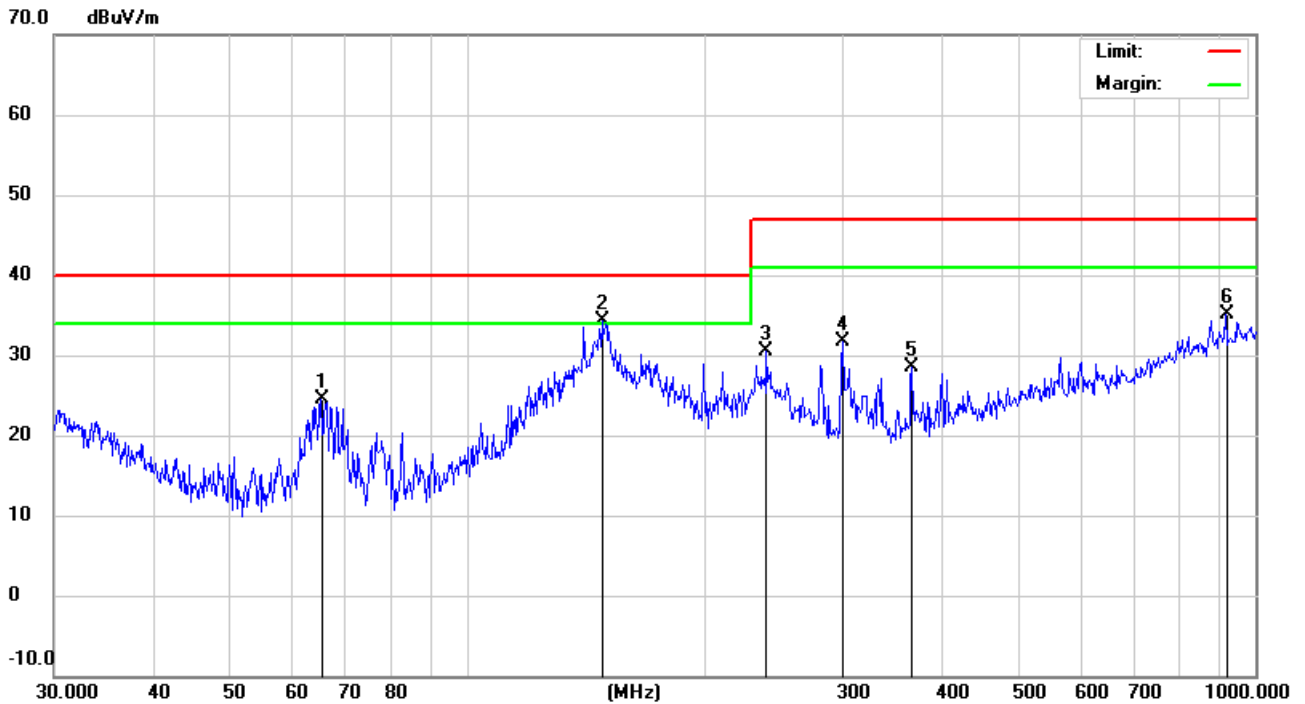

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 65.3432  | 15.53         | 8.97           | 24.50       | 40.00  | -15.50 | QP             |              |         |
| 2   | *   | 148.4410 | 16.85         | 17.50          | 34.35       | 40.00  | -5.65  | QP             |              |         |
| 3   |     | 239.9873 | 16.38         | 14.08          | 30.46       | 47.00  | -16.54 | QP             |              |         |
| 4   |     | 300.3672 | 16.23         | 15.51          | 31.74       | 47.00  | -15.26 | QP             |              |         |
| 5   |     | 366.8231 | 11.72         | 16.77          | 28.49       | 47.00  | -18.51 | QP             |              |         |
| 6   |     | 916.0687 | 5.87          | 29.16          | 35.03       | 47.00  | -11.97 | QP             |              |         |

\*:Maximum data    x:Over limit    !:over margin

**APPENDIX II**  
(Test Photos)

## Radiated Test Setup Photograph





**APPENDIX III**  
(Photos of the EUT)

**Figure 1**  
General Appearance of the EUT




**Figure 2**  
General Appearance of the EUT




**Figure 3**  
Inside of the EUT



**Figure 4**  
Components side of the PCB

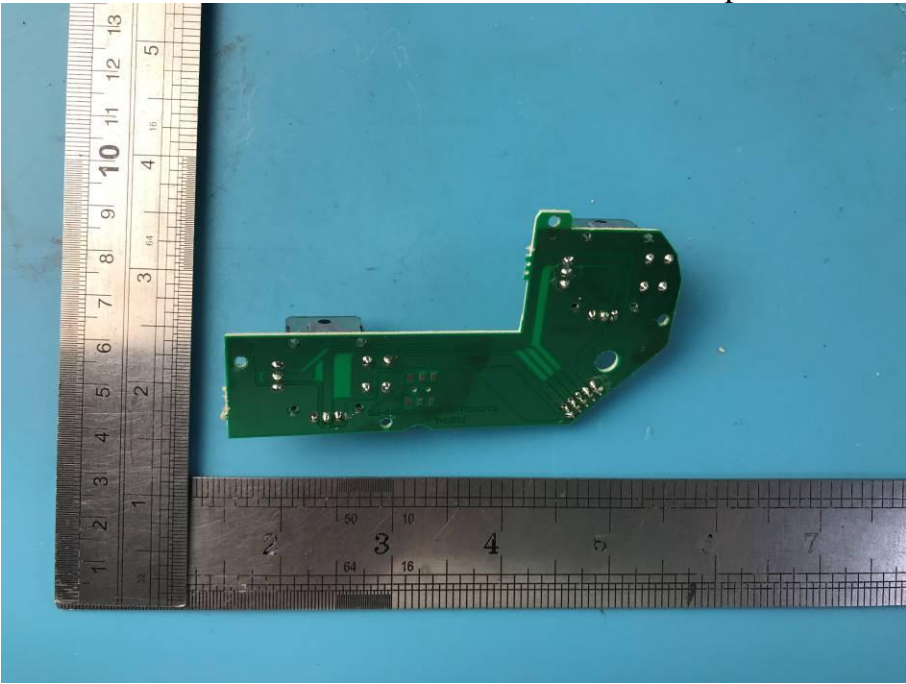


**Figure 5**  
Components side of the PCB

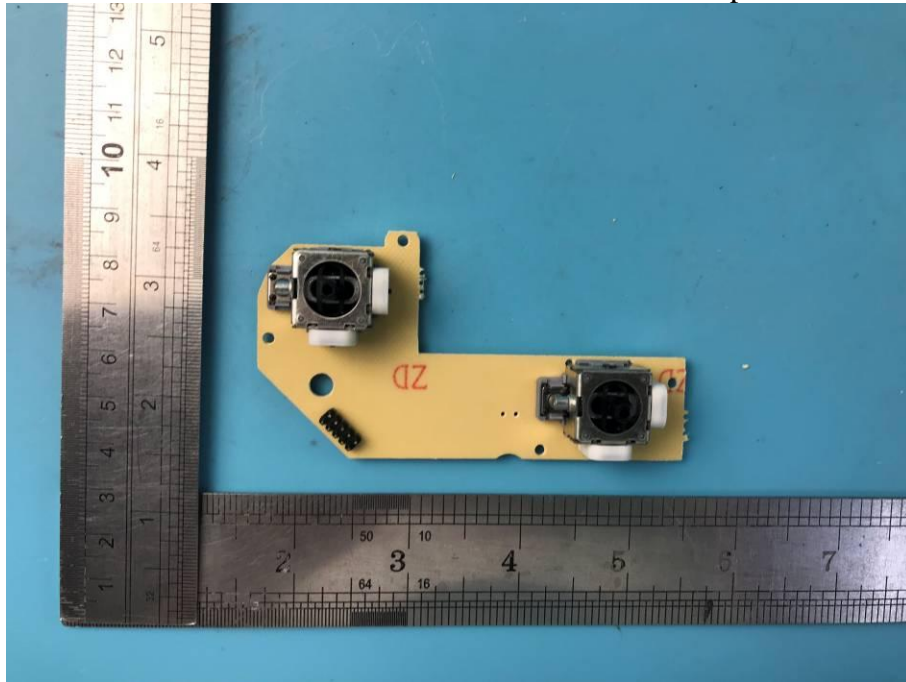


**Figure 6**  
Components side of the PCB



**Figure 7**  
Components side of the PCB

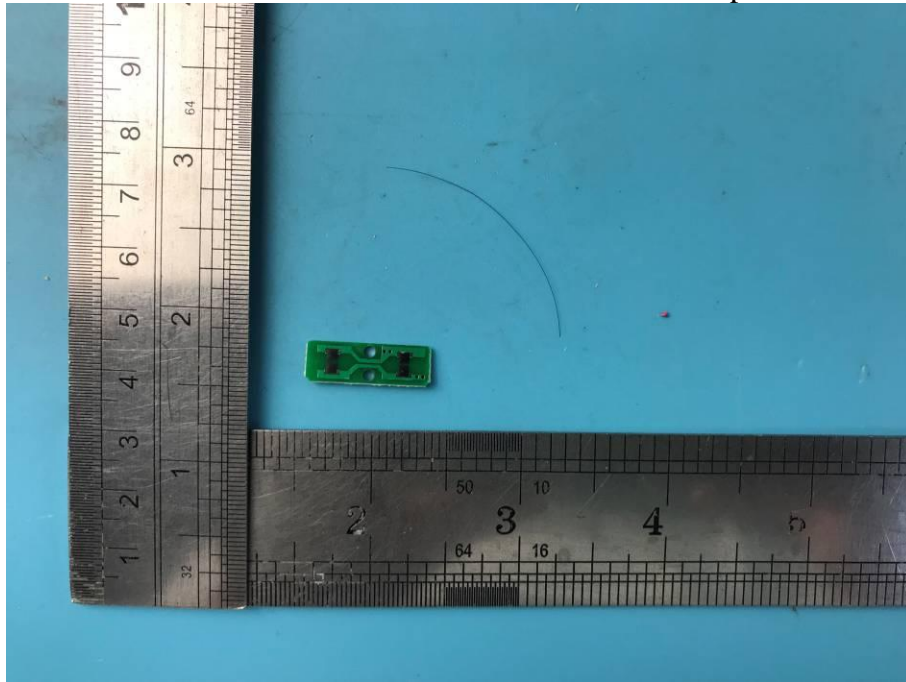

**Figure 8**  
Components side of the PCB

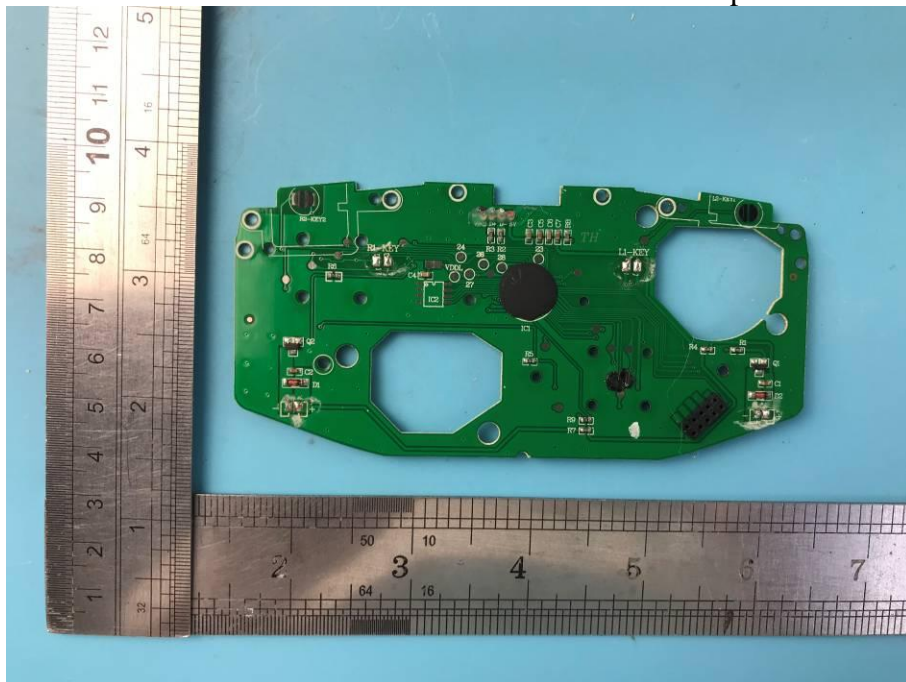



**Figure 9**  
Components side of the PCB

